

# F65

## Leakage clamp multimeter



**For rapid testing of leakage currents  
and isolation faults on live installations!**

- Analysis of RCD trigger currents
- Earth leakage currents
- Unbalanced phase currents
- High immunity to currents of adjacent conductors
- Anti-harmonic filter selection for enhanced fault detection on disturbed systems
- 3-year warranty
- Measurements compatible with the VDE 0404-4, VDE 0413-13 and IEC 61557-13 standards



*Measure up*



# Rapid testing for leakage currents...

Your installation and its users may be endangered through isolation faults and untimely RCD tripping. Such phenomena are often caused by leakage currents that prove difficult to detect.

For testing and maintenance professionals in the industrial and tertiary sectors faced with this challenge, **F65** pocket-sized clamps are the recognized solution, while providing the full range of functions proposed by conventional clamp multimeters.




The compact size facilitates access to the narrowest switchboards!

## DETECTION OF LEAKAGE CURRENTS AND ISOLATION FAULTS

Offering exceptional resolution of  $10\ \mu\text{A}$  and high immunity (70 dB) to eddy currents, the **F65** clamp is specially suited to the measurement of leakage currents that trigger RCDs, causing imbalances between phase-phase and phase-earth currents.

The harmonic filter facilitates the detection of faults on disturbed systems and power circuits (switched power supplies, variable speed drives, inverters, etc.).

### Isolation fault detection on live installations

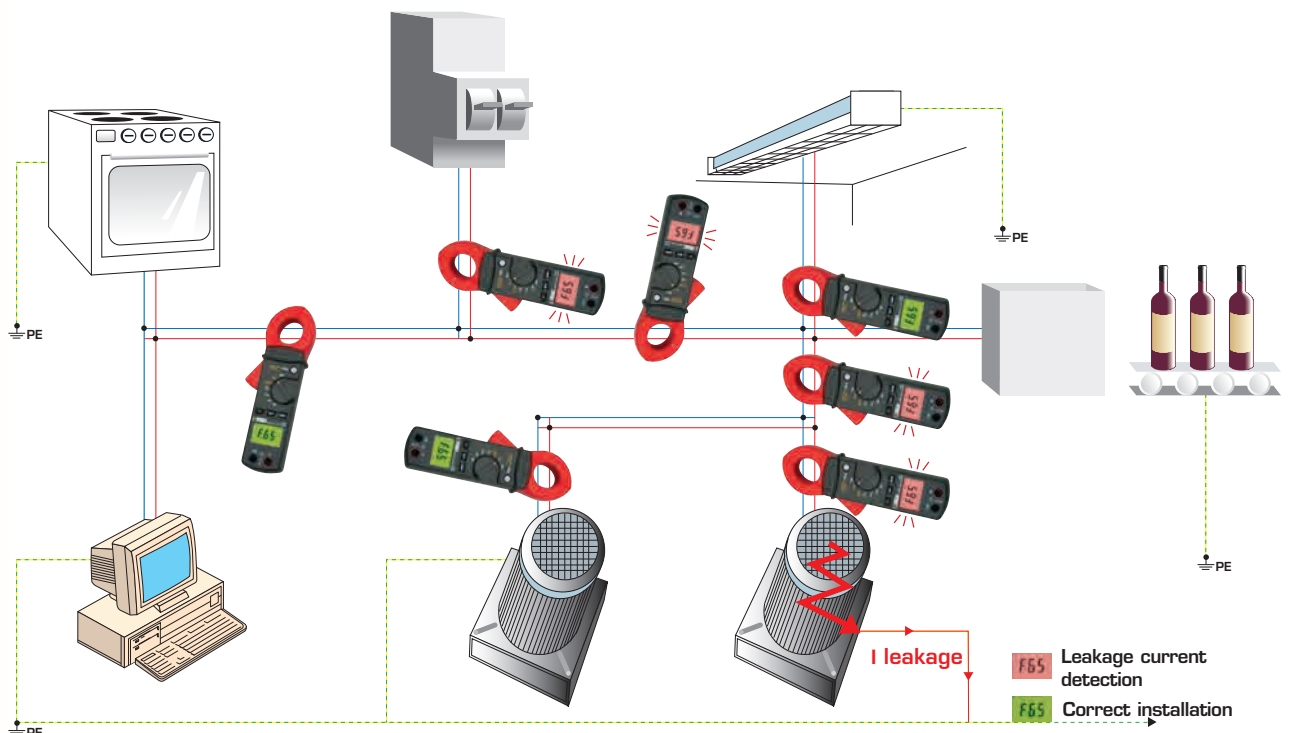


# and detection of isolation faults on live installations!




## ALL-PURPOSE CLAMP MULTIMETERS

**F65** pocket-sized clamps provide the full range of functions proposed by conventional clamp-on multimeters: current up to 100 A, AC/DC voltage, frequency, resistance and audible continuity.

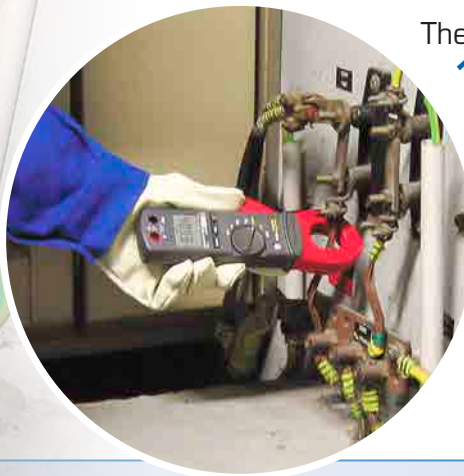

They are equipped with a **backlit 10,000-count LCD screen**, with display memory and **maximum value and differential measurement functions** (Delta). To optimize the battery life, they come equipped with an **automatic power-off function**, in the event of prolonged periods without use.

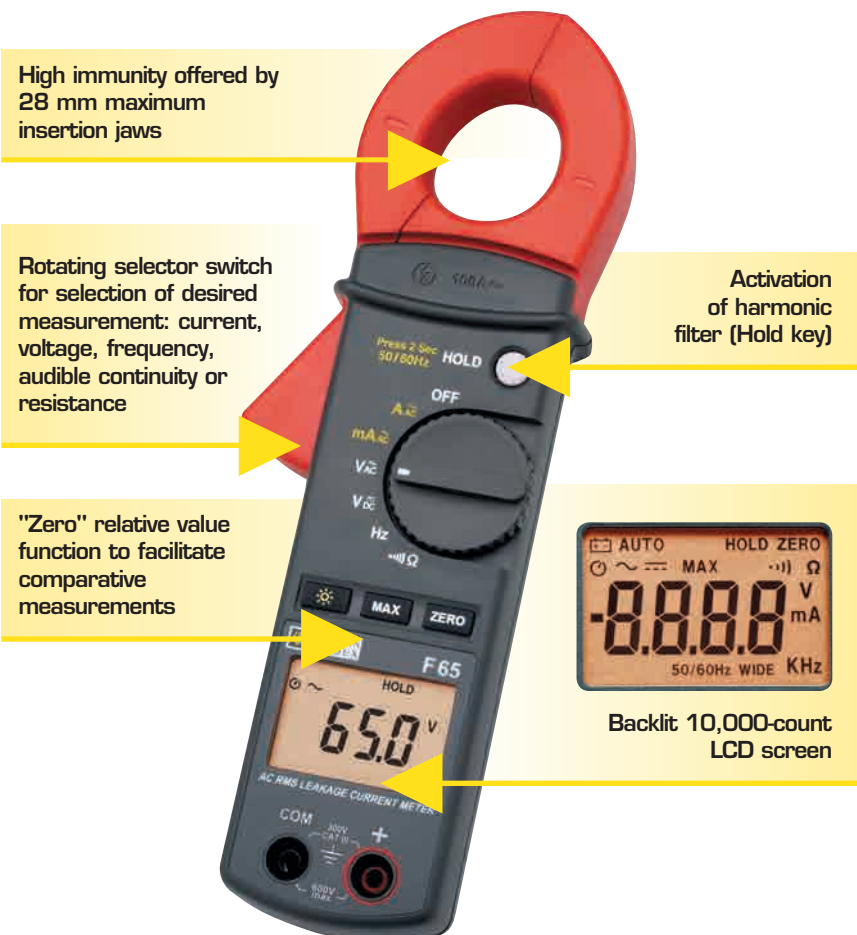

## Other Chauvin Arnoux products for use in association with the F65 clamp

### Clamp jaws open to 115 mm!

The **B102 clamp**, associated with a multimeter, is the ideal accessory for use with F65 clamps to test installation feeders on large-diameter conductors.



### Complete verification of the safety of your electrical installations

In domestic, tertiary or industrial environments (TT, TN or IT systems), the **C.A 6116N electrical installation tester** offers a wide range of measurements for checking and certifying electrical installations' safety and compliance with the standards.



				F65		
RMS measurement				●		
Function	Calibre	Resolution	Accuracy		Protection against overloads	
			<i>with filter 50-60 Hz</i>			
AC current	mA AC	60 mA	10 µA	1.2 % ± 5 cts	2.5 % ± 5 cts (50-500 Hz) 3.5 % ± 10 cts (500 Hz-3 kHz)	150 Arms
		600 mA	100 µA			
	A AC	10 A	1 mA	1.2 % ± 5 cts	2.5 % ± 5 cts (50-500 Hz) 3.5 % ± 10 cts (500 Hz-3 kHz)	
		80 A	10 mA			
100 A						
Voltage	V AC	600 V	0.1 V	1 % ± 5 cts (50-60 Hz) 1.2 % ± 5 cts (50-500 Hz) 2.5 % ± 5 cts (500 Hz-3 kHz)		660 Vrms
	V DC	600 V	0.1 V	1 % ± 2 cts		
Resistance	Ω	1 kΩ	0.1 Ω	1 % ± 3 cts (Vmax measurement 3.3 V DC)		600 Vrms
Audible continuity	Buzzer < 35 Ω					
Frequency	A Hz	100 Hz 1 kHz	0.1 Hz 1 Hz	0.5 % ± 2 cts (I > 10 mA)		
	V Hz	100 Hz 1 kHz	0.1 Hz 1 Hz	0.5 % ± 2 cts (V > 5 V)		
Display				10,000 counts - 2 measurements / s		
Backlit LCD				●		
MAX. value				100 ms		
Relative measurement (ΔD)				●		
Automatic switch-off/ HOLD function				●		
Large clamping diameter				28 mm		
Dimensions				218 x 64 x 30 mm		
Weight				280 g (with batteries)		
Standards				IEC 61010-1 / IEC 61010-2-032 / IEC 61010-2-033		
Installation category				CAT III 300 V		
Protection rating of casing				IP 30 as per NF EN 60529		

## ● To order

### Leakage clamp multimeter

F65..... PO1120761

Delivered with a set of elbowed male banana/straight male banana leads, 1 set of test probes, 2 x 1.5 V AAA/LR3 batteries, 1 bag and 1 operating manual in 5 languages.



### Accessories and replacement parts

Multiple accessories and measurement leads available.

[Please see the guide](#)

[www.chauvin-arnoux.com](http://www.chauvin-arnoux.com)



**FRANCE**  
**Chauvin Arnoux**  
 190, rue Championnet  
 75876 PARIS Cedex 18  
 Tel: +33 1 44 85 44 38  
 Fax: +33 1 46 27 95 59  
 export@chauvin-arnoux.fr  
 www.chauvin-arnoux.fr

**UNITED KINGDOM**  
**Chauvin Arnoux Ltd**  
 Unit 1 Nelson Ct, Flagship Sq, Shaw Cross Business Pk  
 Dewsbury, West Yorkshire - WF12 7TH  
 Tel: +44 1924 460 494  
 Fax: +44 1924 455 328  
 export@chauvin-arnoux.fr  
 www.chauvin-arnoux.fr

**MIDDLE EAST**  
**Chauvin Arnoux Middle East**  
 P.O. BOX 60-154  
 1241 2020 JAL EL DIB - LEBANON  
 Tel: +961 1 890 425  
 Fax: +961 1 890 424  
 camie@chauvin-arnoux.com  
 www.chauvin-arnoux.com